



### Standard

**CAL EXT** **Adjusting program (CAL):** For quick setting of the balance's accuracy. External adjusting weight required.

**PCS** **Piece counting:** Reference quantities selectable. Display can be switched from piece to weight.

**GLP** **GLP/ISO record keeping** of weighing data with date, time and ident.-no. Only with printers from KERN, see page 88.

**%** **Percentage determination:** Displays the deviation from the reference weight (100%) in % instead of grams.

**IP 54-68** **Spray and dust protection:** The type of protection is shown by the pictogram. For a definition see the glossary, page 96.

**TOL** **Weighing with tolerance range:** Upper and lower limiting can be programmed individually, e.g. dosing / sorting.

**INOX** **Stainless steel:** the balance is protected against corrosion.

**230 V** **Power supply:** integrated in balance. 230V/50Hz in Germany. On request GB, AUS or USA version.

### KERN UTEP • UTNN Pallet scale

Mobile for any situation and for heavy loads

Order Hotline:  
Go to back page of catalogue

#### STANDARD



**Display device KERN KME-TM**  
For details see page 86, battery operation standard

only with 1



**Load cells**  
Nickel-plated steel, IP 67



**Delivery 5 days**

**3 Years warranty**

**Strain gauges**

**OPTION Verification**

**OPTION Verification**

**OPTION Verification**

**OPTION Verification**

**OPTION Verification**

**OPTION Verification**

**OPTION Verification**

**OPTION Verification**

**OPTION Verification**

**OPTION Verification**

**OPTION Verification**


**OPTION Verification**

**OPTION Verification**

**OPTION Verification**

**OPTION Verification**

**OPTION Verification**

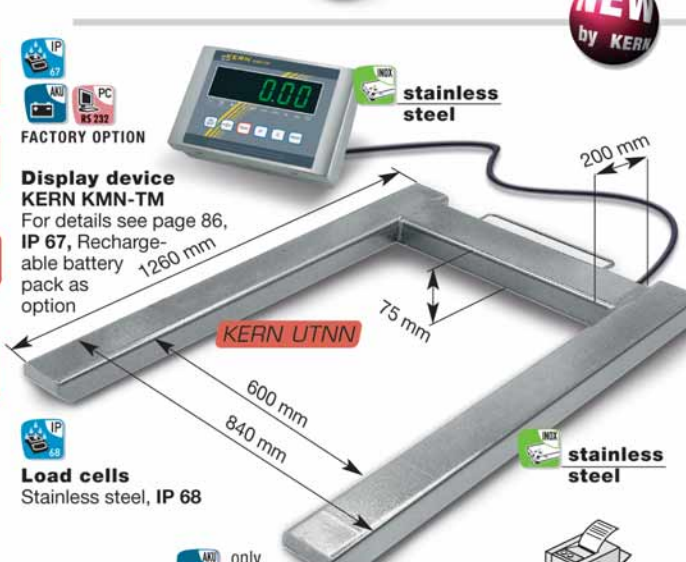

**PC RS 232** **data interface,** including interface cable approx. 1.5 m, must be ordered at purchase, KERN KMN-A03

**only UTNN** **Rechargeable battery pack,** internal operating time approx. 35 h, charging time approx. 8 h, as an option, must be ordered at purchase, KERN KMN-A01

**only UTNN** **Standard printer KERN YKB-01**

**Label printer KERN YKL-01**

**only UTNN** **Statistics printer KERN YKT-01**

**For all printers, see page 88.**

**56** **Factory verification, location of use with post code required.**

**Permitted environmental temperature -10 ... +40 °C.**

#### General characteristics for all models

**Verification** **Verified pallet scale**  
ideal for commercial and trade use

**Load support**  
Solid steel construction. Extremely resistant to bending due to material thickness.

**Large bright LED display**  
digit height 30 mm, cable length approx. 5 m

**TOL** **Weighing with tolerance range**  
Checkweighing with upper/lower limits. Rapid visual weight checking

**Roller and load cell** from underneath

#### Accessories for all models

**Stand** to elevate the display device, made of stainless steel, stand height 1100 mm, KERN UTNN-A01

**Wall mount** for the display device  
KERN KME-TM:  
KERN KME-A01  
KERN KMN-TM:  
KERN KMN-A02

Model	Weighing range Max kg	Read-out d g	Verific. Value e g	Min. load Min kg	Net weight approx. kg	OPTION Verifi- cation KERN
KERN UTEP 600K200M	600	200	200	4	65	950-130 1
KERN UTEP 1.5T0.5M	1500	500	500	10	65	950-130 1
KERN UTNN 600K200IPM	600	200	200	4	68	950-130 1
KERN UTNN 1.5T0.5IPM	1500	500	500	10	68	950-130 1

### KERN - Your DKD-Calibration Partner

issues DKD calibration certificates for balances and test weights in its own accredited laboratories. It is internationally valid.

KERN is a manufacturer of test weights in the international classes of accuracy E1, E2, F1, F2, M1, M2, M3, from 1 mg up to 2000 kg

DKD = German Calibration Service



Your KERN specialist dealer